

Converter® 50 liters

H50/MO50/NV30

SPECIFICATIONS

i	total installed power:	10 kW
	machine footprint:	720 mm
		700 mm
		1100 mm height
	dry weight:	250 kg
	treatment chamber volume:	50 lt
	noise:	80 dB
	production rate:	8 to 12 kg/h of waste treated

AVERAGE CONSUMPTION

battery icon	electricity:	around 0,4-0,6 kW/kg based on waste moisture content
--------------	--------------	--

CONNECTIONS

network icon	cooling water inlet: 1'	cooling water outlet: 1'
	tap water inlet: 1/2'	condensate discharge: 1'




Converter® 50 liters

H50/MO50/NV30

Room requirements:

Room ventilation: 10 air changes per hour
Working environment temperature: 6°C÷45°C

Machine dimensions:

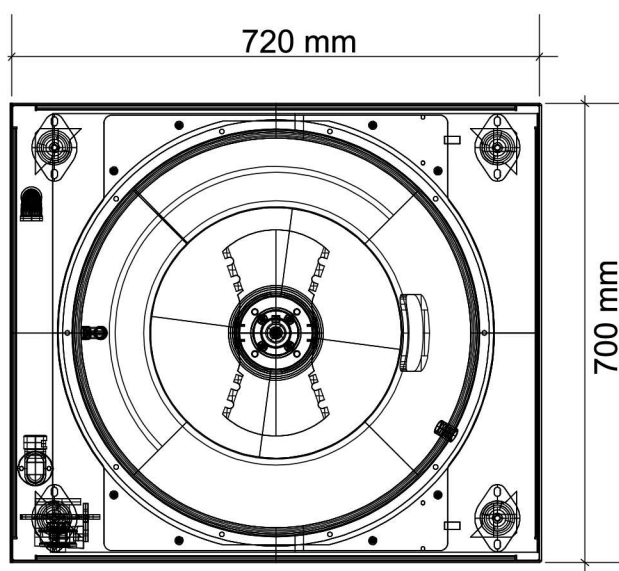

OMPECO

OMPECO s.r.l.
Via Cavalieri del Lavoro 16
10024 Moncalieri
Torino, Italy
www.ompeco.com
info@ompeco.com

Legal headquarters and billing address:
Corso Laghi 26
10051 Avigliana - Torino, Italy
Reg. Imp. RI/PRA/2014/46068/800
R.E.A. di Torino 118899
VAT n° IT11118350013

Information, photos and description contained in this publication are supplied for informative purpose and are not binding.